


iNFINITI M1D1 Line Card

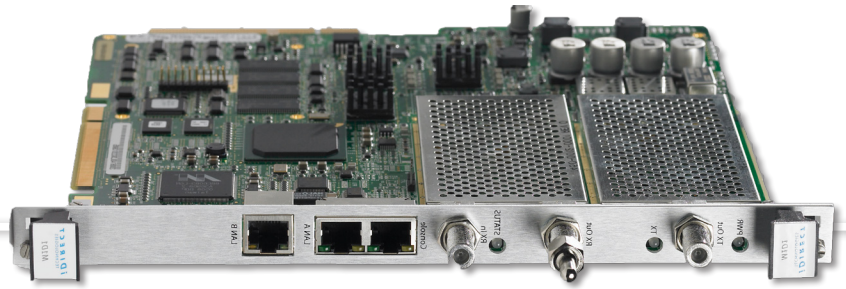

The iNFINITI M1D1 line card features one modulator and one demodulator and fits in any new or existing universal hub chassis, making network expansion easy. The line card can reach IP data rates of up to 20 Mbps on the outbound and up to 10.8 Mbps on the inbound, based on TDM/deterministic MF-TDMA. It is ideally suited for broadband applications such as Internet and VPN access, along with real-time VoIP and videoconferencing.

Network Configuration

Modem	One Modulator (Transmit one downstream carrier) One Demodulator (Receive one upstream carrier)
Symbol Rates	Downstream (TDM): Up to 15 Msps Upstream (D-TDMA): Up to 7.5 Msps
Modulation	Downstream (TDM): BPSK, QPSK, 8PSK Upstream (D-TDMA): BPSK, QPSK, 8PSK
Max Info Rate	Downstream (TDM): Up to 18 Mbps Upstream (D-TDMA): Up to 11.8 Mbps
Max IP Data Rates	Downstream (TDM): Up to 17.6 Mbps (when using QPSK, 0.879 FEC) Upstream (D-TDMA): Up to 10.8 Mbps (when using QPSK, 0.793 FEC, unrestricted NMS)
FEC	Downstream: Turbo BPSK .495-.879, QPSK .495-.879, 8PSK .793-.879 Upstream: Turbo BPSK .431-.793, QPSK .533-.793, 8PSK .660
Interoperability	Compatible with Series 15000 Universal Hub (5IF/20Slot) chassis and Series 12100 Universal Hub (Commercial 4-slot) chassis occupying one chassis slot

Interfaces

SatCom Interfaces	TxIF: Type-F, 950-1700 MHz, +7dBm/-35dBm RxIF: Type-F, 950-1700 MHz, -5dBm/-65dBm
Data Interfaces	LAN: RJ-45, two 10/100Base-T RS-232: RJ45 (Console connection)

Mechanical/Environmental

Redundancy	Software Controlled, Hot-swappable
Weight	~1.2 lbs (0.6 Kg)
Operating Temperature	0 to 45°C (32° to 113°F)
Radio Standards (System Level)	EN 301-428 v1.3.1 — Ku-Band System Level Specification EN 301-443 v1.3.1 — C-Band System Level Specification
Safety Standards (System Level)	Complies with IEC 60950, EN 60950-1, UL 60950-1, CSA C22.2 No.60950-1-03
Emission Standard (System Level)	Complies with EN 55022 Class A, FCC Part 15 Class A, CISPR 22 Class A, EN 61000-3-2, EN 61000-3-3
EMC/Immunity Standard (System Level)	Complies with EN 55024, EN 301-489-1, EN 301-489-12, EN 61000-4-2, EN 61000-4-3, EN 61000-4-4, EN 61000-4-5, EN 61000-4-6, EN 61000-4-11
Certification	FCC, CE, and RoHS Compliant